


XT Series 60

Granulators dedicated to scraps recovery from rigid or flexible extrusion for small sprues or heavy moulds, also suitable for second step grinding of pre-crushed pieces.

The granulators of this series, thanks to the special design of the cutting chamber, are also widely used for an immediate and safe inline grinding of film and trims.



Access without tools to the main parts subject to ordinary maintenance. Grinding chamber equipped with lock for first double bevel, containment discs and rings, discharge screen in antiwear execution.

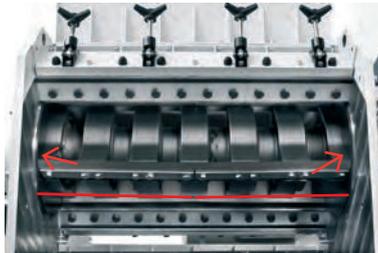

Rotary discs integral with the rotor and rings. Arrow cutting configuration for grinders with 3 or 5 blades; bench adjustment of blades and counterblades.



Rotor lock for maintenance. Safety devices and circuit in compliance with EEC Directives.



Chamber water cooling. Screen equal to approximately 50% of blades rotation length.



Hopper opening with motorized jack and screen-holder opening by gas cylinder.

XT Series 60

FEATURES XT 7060

Feeding opening (mm): **730 x 570**
 Nr. blades / counter-blades: **3 - 5 / 2**
 Rotor speed (RPM): **400**
 Rotor diameter (mm): **500**
 Motor (kW): **55**
 Weight (kg): **3900**
 Standard screen (mm): **9**
 Indicative throughput (kg/hr): **700 ÷ 1000**

FEATURES XT 11060

Feeding opening (mm): **1100 x 570**
 Nr. blades / counter-blades: **3 - 5 / 2**
 Rotor speed (RPM): **400**
 Rotor diameter (mm): **500**
 Motor (kW): **75**
 Weight (kg): **5700**
 Standard screen (mm): **9**
 Indicative throughput (kg/hr): **900 ÷ 1200**

FEATURES XT 16060

Feeding opening (mm): **1600 x 570**
 Nr. blades / counter-blades: **5 / 2**
 Rotor speed (RPM): **400**
 Rotor diameter (mm): **500**
 Motor (kW): **90**
 Weight (kg): **6000**
 Standard screen (mm): **9**
 Indicative throughput (kg/hr): **1200 ÷ 1500**



OPTIONAL

- A) Blades and screen in antiwear execution
- B) Fixed discs
- C) Enlarged cutting chamber (7060 and 11060)
- D) Soundproof on board
- E) Aphonc tunnel for conveyor belt
- G) Level control
- H) Discharge with suction group not on board
- I) Hoppers for pipes and sheets
- L) Hoppers for trims

DIMENSIONS

	A	B
XT 7060	730	1430
XT 11060	1100	1795
XT 16060	1600	2300

CHAMBER SECTION: XT SERIES

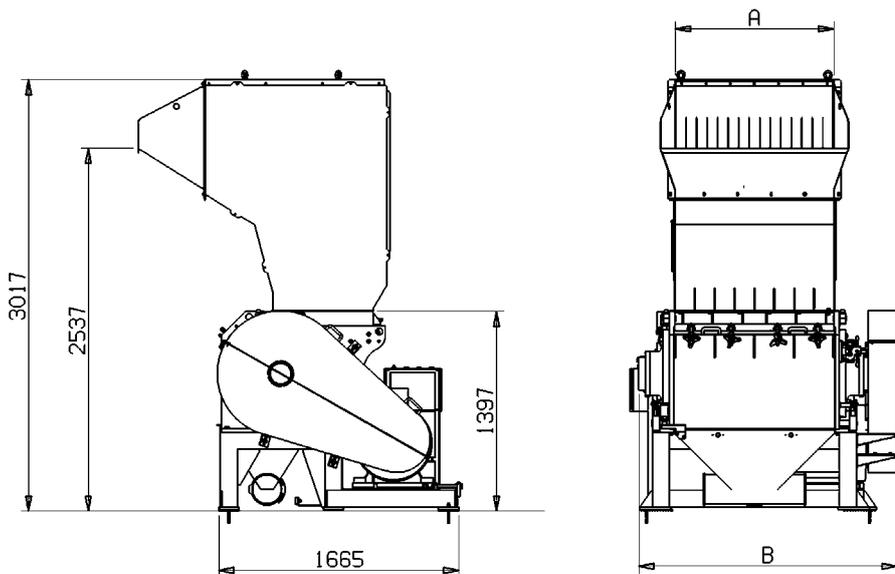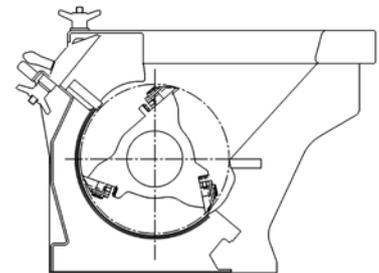

ACCESSORIES

- Conveyor belt
- Soundproof on board
- Depowdering system LT
- Depowdering system DP
- Suction group not on board
- Metal detector
- Soundproof tunnel

